



RP48

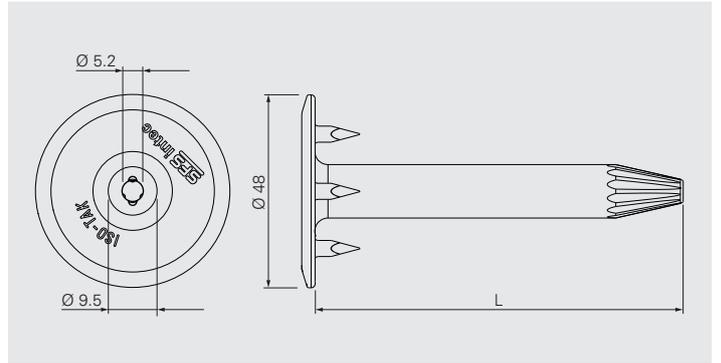

Application

Sleeve with 3 peaks for waterproof membrane and insulation securement in combination with fasteners BS-4,8, BS3-4,8 and BS-S-4,8.
For seam fastening application.

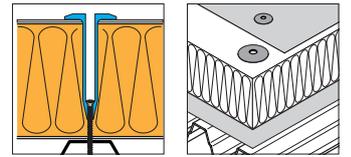

Overlap length between sleeve and fastener: 20 mm

Product Information

Material: High quality polypropylen (PP)

Approvals/Assessments



Declaration of Performance (DoP)

Features and Benefits

- High performance sleeve with 3 peaks provides high design values
 - FM Approval
 - Optimized sleeve tip for reduced penetration force
-

Product Range

Product Code	L _{mm}	PU	Material No.
RP48×30	30	1000	528545
RP48×60	60	1000	528552
RP48×90	90	1000	528555
RP48×120	120	500	528558
RP48×150	150	500	528559
RP48×180	180	500	528561
RP48×210	210	500	528562

Products to combine with

Product Code	Description	
BS-4,8	Carbon steel fastener for steel deck and timber and timber-based boards.	
BS-S-4,8	Stainless steel fastener for steel deck and timber and timber-based boards.	
BS3-4,8	Carbon steel fastener for thick steel deck.	

Tools and Accessories

Product Code	Description	
ZA¼"-M6-300 ZA¼"-M6-750	Drive bar for installation of fastener and sleeve, length 300 mm and 750 mm	
ZA¼"-M6-EXT	Drive bar extension, length 100 mm	
T25-32-M6-RING	Insert bit with T25 drive and ring to hold sleeves RP48, RP50, RP75 onto bit	